




Uticor Lite Marquee Selection and Specifications

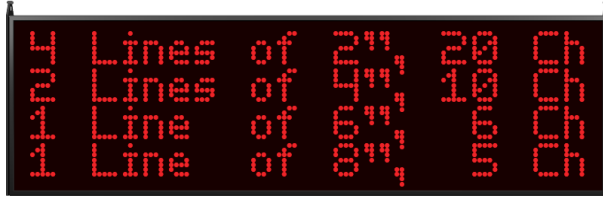

UTLMR-4L20C UTLMRH-4L20C

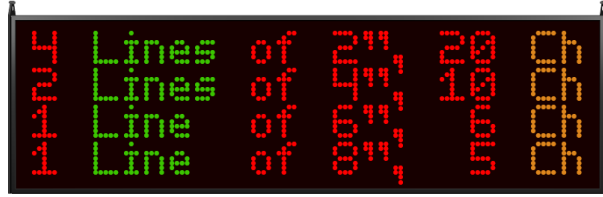

UTLMT-4L20C

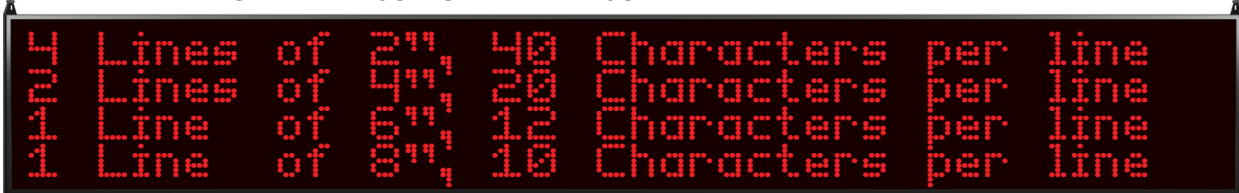

UTLMR-4L40C UTLMRH-4L40C



UTLMT-4L40C

Uticor Lite Marquee Model Specifications				
Part Number	UTLMR-4L20C UTLMR-4L20C-E UTLMR-4L20C-D UTLMR-4L20C-P UTLMRH-4L20C UTLMRH-4L20C-E UTLMRH-4L20C-D UTLMRH-4L20C-P	UTLMT-4L20C UTLMT-4L20C-E UTLMT-4L20C-D UTLMT-4L20C-P	UTLMR-4L40C UTLMR-4L40C-E UTLMR-4L40C-D UTLMR-4L40C-P UTLMRH-4L40C UTLMRH-4L40C-E UTLMRH-4L40C-D UTLMRH-4L40C-P	UTLMT-4L40C UTLMT-4L40C-E UTLMT-4L40C-D UTLMT-4L40C-P
Display Type for Indoor	RED LED	TRI-Color LED	RED LED	TRI-Color LED
Display Type for "H"	RED Sunlight Readable		RED Sunlight Readable	
Specification	4 Lines of 20 Char (2")		4 Lines of 40 Char (2")	
Max. Viewable Distance	400 Feet with 8" Characters			
Power Consumption	55 watts	100 watts	100 watts	180 watts
Agency Approvals	UL, CUL, CE, pending			
Enclosure	NEMA 12			
Operating Temperature	0° to 60° C Ambient			
Storage Temperature	-40° to 95° C Ambient			
Humidity	10% to 95% RH, Non-Condensing			
Input Power	110/220 VAC, 47-63Hz			
Electrical Interference	NEMA ICS 2-230 Showering Arc Test			
Electrical Tolerance	ANSI C37.90a-1974 (SWC) Surge With-Stand Capability Test			
Vibration	5 - 55 Hz 2G for 2 hours in the X, Y, and Z axis			
Shock	10G for under 12ms in the X, Y, and Z axis			
Serial Communications	Port 1 RS232; Port 2 RS422/485			
External Dimensions	36.577" x 11.720" x 2.750" (929.06 x 297.69 x 69.85mm)		72.450" x 11.720" x 2.750" (1840.24 x 297.69 x 69.85mm)	
Weight	15 lbs	16 lbs	30 lbs	32 lbs